



## APPLICATIONS

### Oil and Gas industry

- All petroleum production and refining
- Petroleum loading and transportation
- Petroleum storage and retail
- LNG industry
- All mining operations and service

### Chemical industry

- All types of paint facilities
- Chemical production and storage

### Ocean, marine and aerospace field

- Ocean platform operation facilities and structure
- Aerospace clean room and production
- Ocean vessel operations

### Metal treatment

- Steel and aluminum factories
- Pumping stations in any environment
- Metal smelting, foundry and fabrication

### Food and alcohol industry

- Flour and fine particle production and storage
- Food and distilling production
- Alcohol industry

**Other high humidity, high dust,  
high temperature, vapor locations**

## FEATURES

- Working Temperature: -40°C ~ +40°C/55°C.
- High quality SMT LED and Meanwell Driver.
- Light-weight design by aircraft aluminum.
- Heavy-duty and high impact resistance.
- Three connection cable entry points.
- Replaceable LED board and drivers.
- Integrated junction box for driver with emergency back up.
- Dimmable and battery back up function available.
- Marine rating powder coated appearance treatment.
- Up to 5 years limited warranty option.
- Emergency Battery back up to three hours.
- Various installation ways for different applications.
- Glass lens or Glass with polycarbonate lens to make bigger beam angle

## MATERIALS

- Housing: Aluminum
- Lens: Tempered glass
- Hardware: stainless steel
- Mounting Bracket: stainless steel

## EXPLOSION PROTECTION

Marking ATEX

II2 G Ex mb eb IIC T4 Gb

II2 D Ex tb IIIC

T135°C Db IP66 II3 G

Ex ec IIC T3 Gc

II2 D Ex tb IIIC T85°C Db IP66

Marking IECEX Ex mb

eb IIC T4 Gb

Ex tb IIIC T135°C Db IP66

Ex ec IIC T3 Gc

Ex tb IIIC T85°C Db IP66

Marking UI844 (North American)

Class I, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G

Class II, Division 2, Groups F, G

Class III

Marine Marking UL

1598A ABS

Other Rating IP 66




**B2**



**B**




**B3**



**B4**

## LIGHT DISTRIBUTION

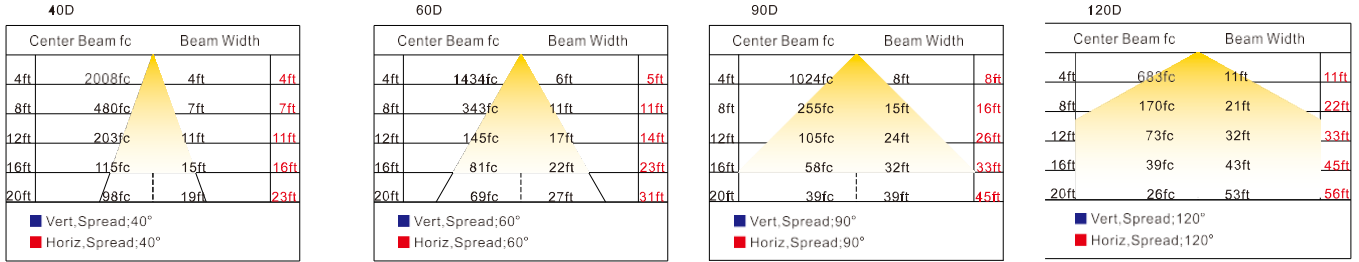

## SPECIFICATION

Product Number	Wattage	Color Temperature	Voltage	Lumens	Warranty	CRI
EX-20W B2YZDA	20	2200K-7000K	AC100-277V(by driver or by IC) Or DC12-48V	2800	5 years	80
EX-40W B2YZDA	40			5600		
EX-60W BYZDA	60		AC100-277V(by driver or by IC) Or DC12-48V Or AC200-480V(<65W)	8400		
EX-80W BYZDA	80		11200			
EX-100W B3YZDA	100		AC100-277V(by driver or by IC) Or DC12-48V Or AC200-480V	14000		
EX-120W B3YZDA	120			16800		
EX-150W B3YZDA	150			21000		
EX-200W B3YZDA	200			28000		
EX-250W B4YZDA	250			35000		
EX-300W B4YZDA	300			42000		
EX-350W B4YZDA	350			49000		
EX-400W B4YZDA	400		56000			


“ B2,B3,B4” =Product code. “ Y” =D or N:Dimmable or non-dimmable “ Z” =CCT, from 2200-7000K.“ D” =Beam angle, D40 for 40°, D60 for 60°, D90 for 90°, D120 for 120°, A for glass info. blank for flat glass, c for spherical glass.

## PACKAGE INFORMATION


Model	Quantity/Carton	Length(cm)	Width(cm)	Height(cm)	Net weight(kg)	Gross weight(kg)
B	1	38.6	33	22	4.4	5.5
B2	1	36	35.4	26	3.5	5
B3	1	48	46	26.5	8.2	10.5
B4	1	53	53	44	18.8	21.5

## DIMENSION


**Model B2**

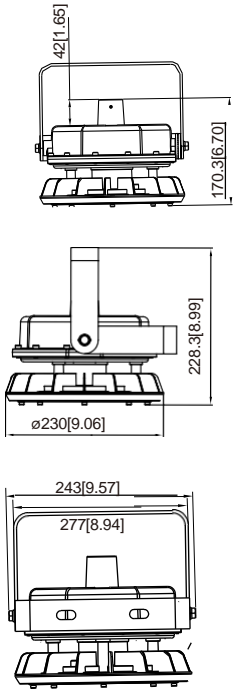


**Model B**

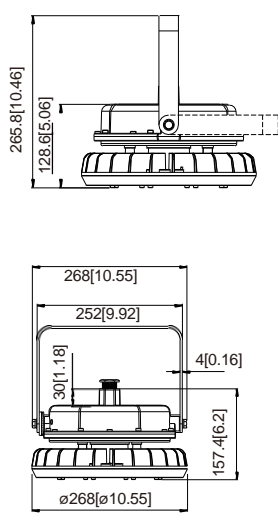

**Model B3**

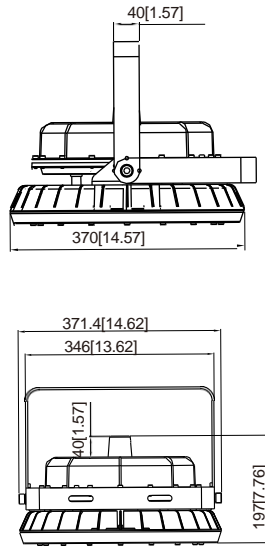


**Model B4**

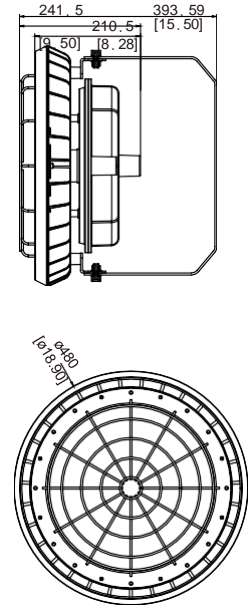


## MOUNTING


**No.1: Ceiling Mounting**

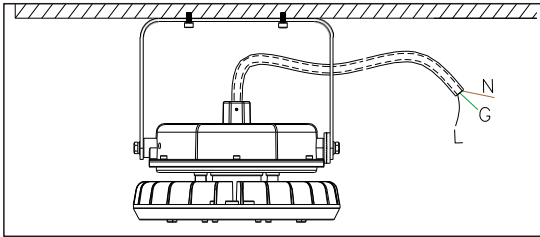


**No.2: Wall Mounting**




**No.3: Pole Pendant**




**No.4: Hook Pendant**

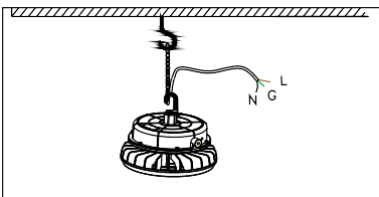


**No.6: 25 Degree Stanchion Mounting**




**No.5: Ceiling Mounting by Opening Driver**

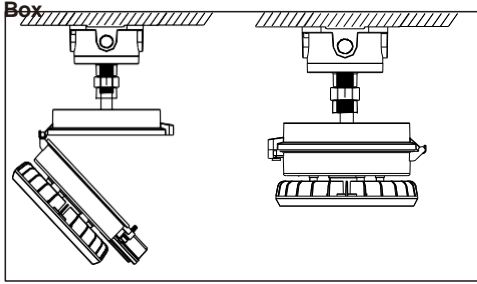

**No.7: Stanchion Mounting**



**No.8: Wall Mounting**

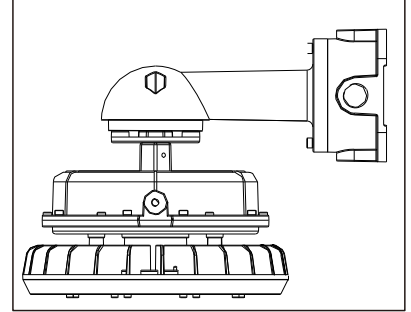

## ACCESSORIES



- Model: Ex-Junction01  
Name: Junction Box  
Material: Aircraft Aluminum A383



- Model: EX-Hook  
Name: Installation Hook  
Material: Aircraft Aluminum A383



- Model: Ex-Conduit01  
Name: Metal Conduit  
Material: Stainless Steel and Aluminum



- Model: EX-WPipe  
Name: Winding Swing Pipe  
Material: Iron with Power Coating



- Model: EX-SPipe  
Name: Winding Swing Pipe  
Material: Iron with Power Coating



- Model: Ex-D01  
Name: Pendant Direction Adapter  
Material: Aircraft Aluminum A383



- Model: EX-MArm  
Name: Surface Mounting Arm  
Material: Aircraft Aluminum A383



- Model: EX-25PSupport  
Name: 25 Degree Pole Support  
Material: Aircraft Aluminum A383



- Model: EX-90PSupport  
Name: 90 Degree Pole Support  
Material: Aircraft Aluminum A383



- Model: Ex-90JSupport  
Name: 90° Arm to Junction box  
Material: Aircraft Aluminum A383



- Model: Ex-25JSupport  
Name: 25° Arm to Junction box  
Material: Aircraft Aluminum A383




- Model: Ex-DArm  
Name: Direct Mounting Arm  
Material: Aircraft Aluminum A383



- Model: Ex-ShadeB/B2/B3  
Name: Lamp Shade  
Material: Aluminum A6061



- Model: Ex-CshadeB/B2/B3  
Name: Cut off lamp shade  
Material: Aluminum A6061



- Model: Ex-Chain  
Name: Pendant Chain  
Material: Stainless Steel S30400