

APPLICATIONS

NewLaVie's Parking Garage Fixture is made of durable die cast aluminum for the harshest of exterior applications, coupled with a protective UV resistant Mitsubishi PC optical lens to prevent yellowing. Reinforced with Lumileds or Cree LEDs for quality light levels, the fixture includes options for Emergency Backup and a motion sensor, making it perfect for any parking garage application..



PRODUCT DESCRIPTION

- Efficacy Range: >140 LPW
- Operating Temperature: -40°F to 136°F
- PF: >0.90
- Chips: Philips Lumileds/ Cree
- CCT: 2700K ~ 6500K / R/G/B/RGB
- CRI: 70+, 80+, 90+ available
- Standard Voltage: 90-305V./347-480V
- 1-10V Dimmable Driver
- 4KV or 10KV Surge Protector optional
- Photosensor and EM backup as options
- DLC, RoHS, ETL, cETL certification
- >70,000 TM21 L70 Hours
- IP65 Rated – wet locations rated
- 5 Year Limited Warranty Standard



MODEL WATTAGE & SOURCE LUMEN TABLE @ >80 CRI

CATALOG NUMBER	WATTAGE	LUMENS 3000K	LUMENS 4000K	LUMENS 5000K	LUMENS 5700K	LUMENS 6500K
PG-R40	40W	5400	5740	6102	6291	6836
PG-R45	45W	6075	6075	6075	6075	6075
PG-R50	50W	6750	6750	6750	6750	6750
PG-R60	60W	8100	8100	8100	8100	8100
PG-R70	70W	9450	9450	9450	9450	9450

CRI	MULTIPLIER
70	1.09
80	1.00
90	0.89

LENS	MULTIPLIER
DOME PRISMATIC	0.96
DOME PRISM/FROST	0.86

DIMENSIONS

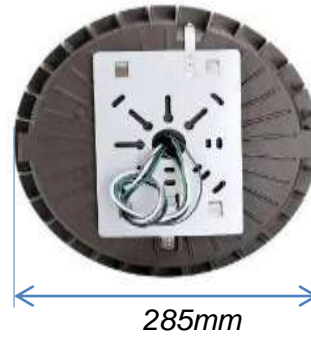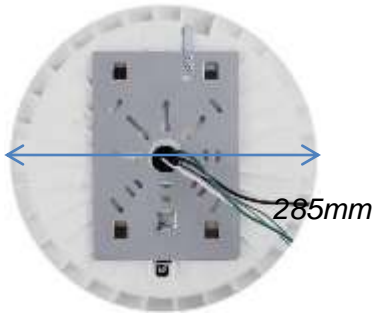

ORDERING GUIDE

EXAMPLE: PG-R-45-40K-BLK-FR-DOM-MS-DM-HE-CM

Wattage		Color Temp		Finish		Lens		Options	
PG-R	40	30K	3000K	BLK	BLACK	FR	FROSTED	MS	MICROWAVE SENSOR
	45	40K	4000K	WHT	WHITE	CL	CLEAR	DM	0-10V DIMMABLE
	50	50K	5000K	BRZ	BRONZE	DOM	DOME	HV	480VAC INPUT
	60	57K	5700K			FL	FLAT	SP	SURGE PROTECTOR
	70	65K	6500K					EM	BATTERY BACKUP
								HK	HOOK MOUNT
								PD	PENDANT MOUNT
								CM	FLUSH CEILING MOUNT