



## APPLICATION

NLV Lighting Linear Pendant fixtures are designed for a wide variety of applications for use in office buildings, schools, healthcare facilities, parking garages, retail shops, warehouses, manufacturing, gyms, and other industrial buildings. These fixtures are a new generation of eco-friendly lights offering high efficacy and exceptional illumination. They can be mounted on a surface or suspended with ease. The high- quality diffuser provides added protection and glare control. These fixtures are energy- efficient replacements for linear fluorescent and HID fixtures.

## FEATURES


- Power Range: 20W to 60W
- Efficiency Range: 130 to 160LM/W
- CCT Range: 3000K/4000K/5000K/5700K
- Operating Temperature: -40oC to 50oC
- Tier-1 LED suppliers; LM80 rated at CRI >75
- 120V to 277V and 120V to 347V
- Tier-1 LED suppliers; LM80 rated at CRI >80
- PF >0.90, THD ≤ 15%
- Emergency battery back up option 15W/25W/25w
- External/ Internal Motion Sensing and Dimming
- Standard 5 Year warranty

## ORDERING GUIDE

**Example: NLV-LLP-CN-40W-50K-277V-140LPW-DSE-WH**

Color Temperature(K)	Input Voltage (V)	Power (W)	Options
<b>30K</b> - 3000K <b>40K</b> - 4000K <b>50K</b> - 5000K <b>57K</b> - 5700K	<b>277V</b> 120V – 277V <b>347V</b> 120V – 347V	20 30 40	<b>Dimming &amp; Sensing</b> <b>DDM</b> - Dimming <b>DDS</b> – Dimming + Sensing <b>DDE</b> – Dimming + Emergency <b>DSE</b> – Dimming + Sensing + Emergency <b>Color</b> <b>WH</b> –White <b>CC</b> –Custom Color

## PHYSICAL DIMENSIONS

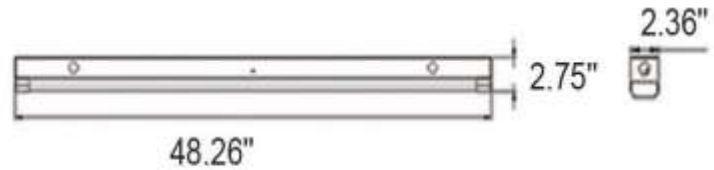

## PRODUCT OPTIONS

